# Aerosol Suction Cleaner MS15 MB2







## **Aerosol Suction Cleaner MS15 MB2**




The **Aerosol Suction Cleaner MS 15 MB2** is ideal to effectively remove moist particles, e.g. short metal chips during thread cutting.

The sucking effect of the Aerosol Suction Cleaner can be activated by changing the position of a ball valve at the compressed air supply line. This feature functions according to the Venturi principle: Compressed air passes a ring nozzle thus creating a vacuum within the suction tube.

The incoming air transports the particles and chips towards the exhaust air hose and the debris container. There is an aluminium filter housing on top of the debris container. It contains three fine filters for the separation of aerosols.

Different brushes, nozzles and filters are available as an option. They allow the Aerosol Suction Cleaner to be used flexibly in a wide variety of applications.

## Technical data

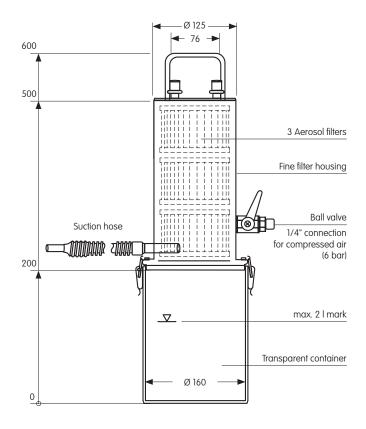

Pneumatic details (6 bar)	
Compressed air quality	filtered (particle size < 40 μm),
	oil free (residual oil < 1.5 mg/m³ at 24 °C)
Compressed air connection	1/4"; 6 bar
Compressed air (6 bar)	
Connection	1/4"
Consumption (at 1.013 bar and 20 °C)	300 l/min
Suction capacity	
Vacuum	-350 mbar (35%)
Suction volume flow	2501/min
Sound pressure level	68 dB(A)
Container volume	max. 2 litres
	Taghaigal data aya aybiratta ah an ag

Technical data are subject to change



#### Order no.

103 60 43 Aerosol Suction Cleaner MS 15 MB 2
with 2 litre container and three
aerosol filters suction tube diameter 14 mm

#### Including:

- 2 litre container with filter housing on top for 3 aerosol filters
- Suction unit with 1.6 m off suction hose DN 15 mm

